

Quick hanger CD 60x27 - T

Product description:

The bracket is used for a quick mounting of drywall steel profiles CD 60 into a horizontal construction of the building. It is produced by compression molding of rolled galvanized metal sheet with thickness of 0.80 mm and single spring clip which is pressed into the hanger with two rivets. The installation is done by sliding into the profile and subsequent hanging on the suspension wire which allows a quick and easy leveling of the construction.



Range of usage:

The product is used for metal profile CD 60x27 mounting into a horizontal construction of the buildings.

Characteristics:

Material	Rolled sheet DX51
Coating	Zinc – min Z100 (ČSN EN 10327)
Thickness	0.80 mm (ČSN EN 10143)
Reaction to fire	Class A1 (EN 14195)
Durability	Class B
Hazardous substance	NPD

Product variability:

Code	Name	Load	Pack	Weight
TMD- 0132 (1.348114 T)	Quick hanger bracket CD 60/27 - T	0,25 kN	100 pcs	0,0260 kg
TMD- 1618 (1.348114.1 T)	Quick hanger no-spring CD 60/27 - T	0.25 kN	100 pcs	0,0175 kg

Real weight may vary in range of +/-5% according to ČSN EN10143

Mounting:

Mount the suspension wire with eyelet into the solid structure with ceiling anchor in required length. Put the quick hanger into the CD profile and rotate it until locked. Slide the spring clip of hanger onto the wire and even out the construction.

Hanger without spring is locked into the profile same way. For mounting into the building structure you can use movable steel belt and metric bolts or self-drilling screws into the wooden laths.

Packaging:


Hangers are packed by 100 pcs in carton box. Every dimension is labeled with identification tag.



Quick hanger CD 60x27 - T

Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.

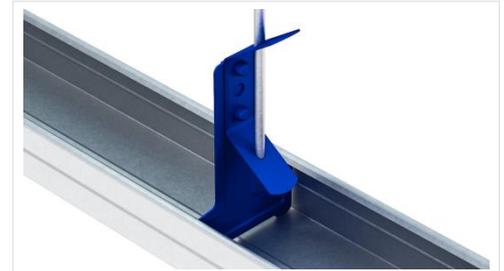

Technical drawing:

