

Wires with eyelet 6 mm

Product description:

Element is made of galvanized steel wire, diameter 4.00 mm. Used to hang drywall or cassette design to lower the ceilings. Eye with a diameter of 6.00 mm wire forms one side and is used for attachment to the solid construction of buildings. Quickhanger or butterfly spring can be mounted on the straight end.



Range of usage:

The product is used for fixing the drywall elements into solid structures of buildings. It is used to reduce the ceiling in plasterboard or cassette structures.

Characteristics:

Material	Drawn wire
Coating	Zinc – min Z100 (ČSN EN 10327)
Thickness	4.00 mm (ČSN EN 10143)
Reaction to fire	Class A1 (EN 14195)
Durability	Class B
Hazardous substance	NPD

Product variability:

Code	Name	Load	Pack	Weight
TMD-0159 (1.348130 T)	Wire with eyelet 6 mm - 0125 mm	0,50 kN	100 pcs	0,0135 kg
TMD-0160 (1.348131 T)	Wire with eyelet 6 mm - 0250 mm	0,50 kN	100 pcs	0,0252 kg
TMD-0161 (1.348132 T)	Wire with eyelet 6 mm - 0375 mm	0,50 kN	100 pcs	0,0368 kg
TMD-0162 (1.348133 T)	Wire with eyelet 6 mm - 0500 mm	0,50 kN	100 pcs	0,0485 kg
TMD-0163 (1.348134 T)	Wire with eyelet 6 mm - 0750 mm	0,50 kN	100 pcs	0,0718 kg
TMD-0164 (1.348135 T)	Wire with eyelet 6 mm - 1000 mm	0,50 kN	100 pcs	0,0950 kg
TMD-0165 (1.348136 T)	Wire with eyelet 6 mm - 1200 mm	0,50 kN	100 pcs	0,1136 kg
TMD-0166 (1.348137 T)	Wire with eyelet 6 mm - 1500 mm	0,50 kN	100 pcs	0,1416 kg
TMD-0167 (1.348138 T)	Wire with eyelet 6 mm - 2000 mm	0,50 kN	100 pcs	0,1881 kg
TMD-0853 (1.348131.1,5,1)	Wire with eyelet 6 mm - 2500 mm	0,50 kN	100 pcs	0,2347 kg
TMD-0852 (1.348135,1,3,1T)	Wire with eyelet 6 mm - 3000 mm	0,50 kN	100 pcs	0,2812 kg
TMD-3881 (1.348131 T15)	Wire with eyelet 6 mm - 0250 mm (blistr 15 ks)	0,50 kN	15 pcs	0,3780 kg

Real weight may vary in range of +/-5% according to ČSN EN10143



Wires with eyelet 6 mm

Mounting:

Mount the wire through the eye to the ceiling using anchors or nail-plugs. Another possibility is to attach the wire to the beam clamp, which is attached to a steel girder. Put a flat side to the double spring clip or single clip which is part of the product intended for subsequent hanging profile which allows quick and easy leveling construction.



Packaging:


The wires up to length of 500 mm are packed by 100 pcs in carton box. Longer variations are packed by 100 pcs with cable tie. Every dimension is labeled with identification tag.

Blistr packing of wire 250 mm consists of 15 pcs in transparent plastic casing covered by cardboard plate with a description of the product.

Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.

Technical drawing:

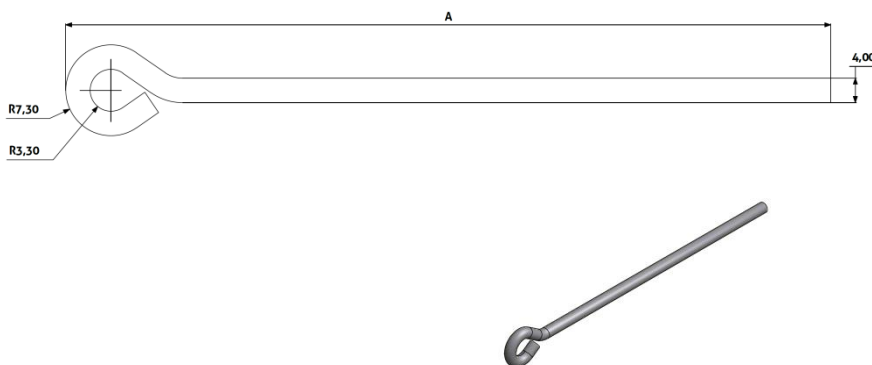

Code	Product	Weight	A
TMD-0159	Wire with eyelet – 0125 mm	0,0142 kg	125 mm
TMD-0160	Wire with eyelet – 0250 mm	0,0265 kg	250 mm
TMD-0161	Wire with eyelet – 0375 mm	0,0387 kg	375 mm
TMD-0162	Wire with eyelet – 0500 mm	0,0510 kg	500 mm
TMD-0163	Wire with eyelet – 0750 mm	0,0755 kg	750 mm
TMD-0164	Wire with eyelet – 1000 mm	0,1000 kg	1000 mm
TMD-0165	Wire with eyelet – 1200 mm	0,1196 kg	1200 mm
TMD-0166	Wire with eyelet – 1500 mm	0,1490 kg	1500 mm
TMD-0167	Wire with eyelet – 2000 mm	0,1980 kg	2000 mm
TMD-0853	Wire with eyelet – 2500 mm	0,2470 kg	2500 mm
TMD-0852	Wire with eyelet – 3000 mm	0,2960 kg	3000 mm

