

Wires with arch 8 mm

Product description:

Element is made of galvanized steel wire, diameter 4.00 mm. Used to hang drywall or cassette design to lower the ceilings. Arch forms one side and is used for attachment to the solid construction of buildings. Quickhanger or butterfly spring can be mounted on the straight end.



Range of usage:

The product is used for fixing the drywall elements into solid structures of buildings. It is used to reduce the ceiling in plasterboard or cassette structures.

Characteristics:

| | |
|----------------------------|--------------------------------|
| Material | Drawn wire |
| Coating | Zinc – min Z100 (ČSN EN 10327) |
| Thickness | 4.00 mm (ČSN EN 10143) |
| Reaction to fire | Class A1 (EN 14195) |
| Durability | Class B |
| Hazardous substance | NPD |

Product variability:

| Code | Name | Load | Pack | Weight |
|----------|-------------------------------|---------|---------|-----------|
| TMD-4396 | Wire with arch 8 mm - 0125 mm | 0,50 kN | 100 pcs | 0,0145 kg |
| TMD-4403 | Wire with arch 8 mm - 0250 mm | 0,50 kN | 100 pcs | 0,0261 kg |
| TMD-4631 | Wire with arch 8 mm - 0375 mm | 0,50 kN | 100 pcs | 0,0377 kg |
| TMD-4404 | Wire with arch 8 mm - 0500 mm | 0,50 kN | 100 pcs | 0,0494 kg |
| TMD-4632 | Wire with arch 8 mm - 0750 mm | 0,50 kN | 100 pcs | 0,0727 kg |
| TMD-4405 | Wire with arch 8 mm - 1000 mm | 0,50 kN | 100 pcs | 0,0960 kg |
| TMD-4406 | Wire with arch 8 mm - 1500 mm | 0,50 kN | 100 pcs | 0,1425 kg |
| TMD-4633 | Wire with arch 8 mm - 2000 mm | 0,50 kN | 100 pcs | 0,1891 kg |
| TMD-4576 | Wire with arch 8 mm - 2500 mm | 0,50 kN | 100 pcs | 0,2356 kg |
| TMD-4407 | Wire with arch 8 mm - 3000 mm | 0,50 kN | 100 pcs | 0,2822 kg |

Real weight may vary in range of +/-5% according to ČSN EN10143



Wires with arch 8 mm

Mounting:

Mount the wire to the ceiling using hanger peg. Another possibility is to attach the wire to the beam clamp, which is attached to a steel girder. Put a flat side to the double spring clip or single clip which is part of the product intended for subsequent hanging profile which allows quick and easy leveling construction.


Packaging:

The wires up to length of 500 mm are packed by 100 pcs in carton box. Longer variations are packed by 100 pcs with cable tie. Every dimension is labeled with identification tag.

Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.

Technical drawing:

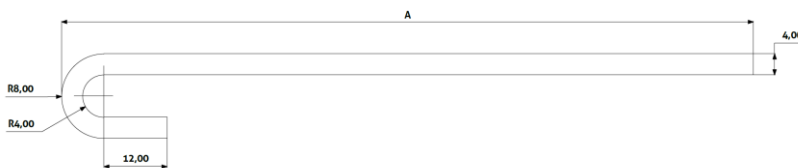

| Code | Product | Weight | A |
|----------|--------------------------|-----------|---------|
| TMD-4396 | Wire with arch – 0125 mm | 0,0145 kg | 125 mm |
| TMD-4403 | Wire with arch – 0250 mm | 0,0261 kg | 250 mm |
| TMD-4631 | Wire with arch – 0375 mm | 0,0377 kg | 375 mm |
| TMD-4404 | Wire with arch – 0500 mm | 0,0494 kg | 500 mm |
| TMD-4632 | Wire with arch – 0750 mm | 0,0727 kg | 750 mm |
| TMD-4405 | Wire with arch – 1000 mm | 0,0960 kg | 1000 mm |
| TMD-4406 | Wire with arch – 1500 mm | 0,1425 kg | 1500 mm |
| TMD-4633 | Wire with arch – 2000 mm | 0,1891 kg | 2000 mm |
| TMD-4576 | Wire with arch – 2500 mm | 0,2356 kg | 2500 mm |
| TMD-4407 | Wire with arch – 3000 mm | 0,2822 kg | 3000 mm |

