


## Nonius cotter

### Product description:

It is produced by compression molding of spring wire with diameter of 2.50 mm which is covered by anticorrosive Delta Protekt surface. It is used in the systems where higher load capacity, fire resistance and buckling strength is required.

### Range of usage:

The element is used as security for two parts of nonius set for drywall construction in horizontal system. The set consists of upper part, bottom part and nonius cotters. To ensure the structural strength it is recommended to use two pieces for one connection.

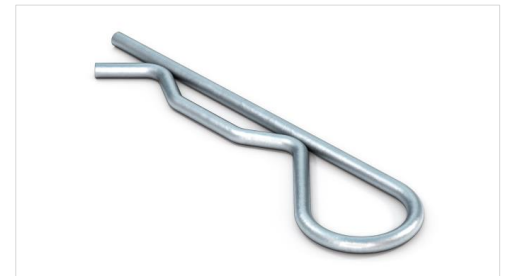

### Characteristics:

<b>Identification code</b>	1.348163,1 T
<b>Order code</b>	TMD-0192-Z
<b>Name</b>	Nonius cotter
<b>Packaging</b>	100 pc
<b>Weight</b>	0.0061 kg
<b>Permissible load</b>	0,25 kN
<b>Material</b>	Spring wire
<b>Thickness</b>	2.50 mm (ČSN EN 10143)
<b>Reaction to fire</b>	Class A1 (EN 14195)
<b>Durability</b>	Class B
<b>Hazardous substance</b>	NPD

Real weight may vary in range of +/-5% according to ČSN EN10143

### Mounting:

Cotter is mounted by sliding into the openings of the nonius articles.

### Packaging:

The cotter is packed by 100 pcs in carton box. Every box is labeled with identification tag.

### Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.



## Nonius cotter

Technical drawing:

