


## Nonius bottom part

### Product description:

The nonius bottom part is used for mounting drywall steel profiles CD 60 into a construction of the building in horizontal system. It is produced by compression molding of rolled, galvanized metal sheet with thickness of 1.25 mm. It is used in the systems where higher load capacity, fire resistance and buckling strength is required. The set consists of upper part, bottom part and nonius cotters. The installation is done by rotating into the profile in horizontal position and a subsequent elevation.

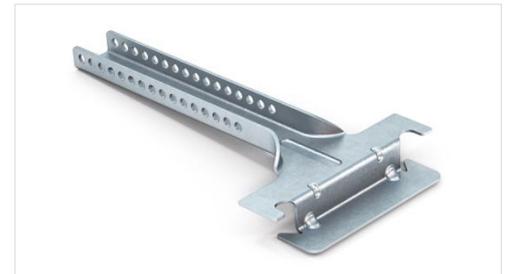

### Range of usage:

The product is used for metal profile CD 60x27 mounting into a horizontal construction of the buildings.

### Characteristics:

<b>Identification code</b>	1.348159 T
<b>Order code</b>	TMD-0188
<b>Name</b>	Nonius bottom part CD 60/27
<b>Packaging</b>	100 pc
<b>Weight</b>	0.0435 kg
<b>Permissible load</b>	0,25 kN
<b>Material</b>	Rolled sheet DX51
<b>Thickness</b>	1.25 mm (ČSN EN 10143)
<b>Reaction to fire</b>	Class A1 (EN 14195)
<b>Durability</b>	Class B
<b>Hazardous substance</b>	NPD

Real weight may vary in range of +/-5% according to ČSN EN10143

### Mounting:

The assembly of this part is carried out by sliding it into the profile in a horizontal position and then upright perpendicular to the profile. The other side of the element is connected to the nonius upper part with two nonius cotters.

### Packaging:

The part is packed by 100 pcs in carton box. Every box is labeled with identification tag.



# Nonius bottom part

## Recommended storage:

The product is required to store in dry and temperate environment in order to prevent condensation on the surface of the product and damage to the packaging.

## Technical drawing:

